


LIMATIC CARBON

Despite its compact size, Limatic Carbon is a powerful machine with a constant pressure of 5.5 bars. Its robust brass suction tubes and a wide range of accessories make Limatic Carbon perfect for professional use.

This innovative steam and vacuum suction system allows the user to easily and perfectly clean points that are usually difficult to reach with other appliances. This is possible thanks to the compact size of the device, the length of its tube (3 meters), and the various accessories supplied with it. These accessories allow the Limatic Carbon lance to slide, without any difficulty, over all surfaces and clean them excellently. Thanks to the washing-hot water extraction module, Limatic Carbon can also remove stubborn dirt. The automatic descaling program and the ergonomically shaped handle (with adjustable height) are two strong points of this steam cleaner. The handle allows the machine to be used by both right- and left-handed people and its height can be adjusted up to 30 centimeters.

This ergonomically shaped handle is made of stainless steel and is, therefore, particularly robust.

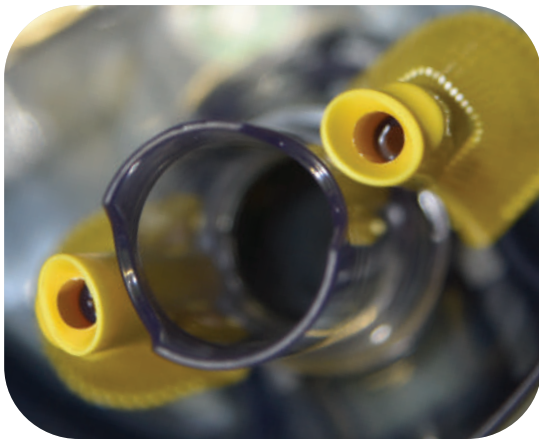


Patented RAIN SYSTEM water filter with Venturi technology

Our steam cleaners that combine steam and suction sanitization use Rain System technology. Pollen, mites, molds, spores and microparticles are sucked into the special patented water filter where two removable and washable side nozzles constantly nebulize high-pressure water, blocking all types of incoming contaminants and giving the environment a perfectly purified-outlet air stream.

Handle for suction control (with 3 adjustment levels)

The Limatic Carbon steam cleaner is equipped with a powerful motor that can be electronically adjusted to three levels, directly from the handle.

The desired steam flow can be set using the dedicated adjustment knob. The minimum steam level allows the user to clean delicate fabrics, upholstered furniture, sofas, parquet and laminate flooring.

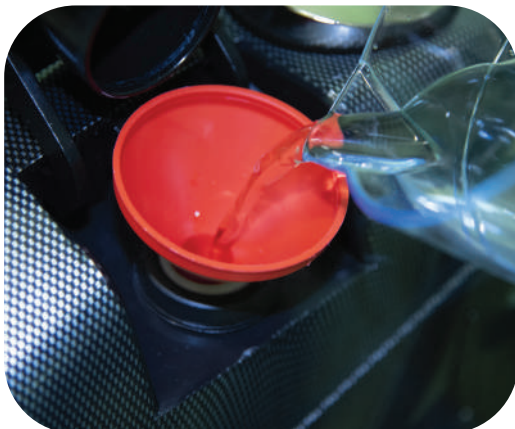

Continuous refill system

Limatic Carbon is equipped with a continuous refill system. You will be able to sanitize without ever having to stop.

LIMATIC CARBON



***Steam, vacuum suction,
washing-hot water extraction, all in one system***

The innovative Limatic Carbon steam system effectively optimizes your cleaning processes.

The winning formula is very simple: better cleaning results in less time. With a power of 3.400 W (230V), a steam pressure of 5.5 bars, and a steam temperature of 162°C, Limatic Carbon ensures the best performance while optimizing consumption. The machine also features a powerful vacuum suction system and the washing-hot water extraction function which loosens stubborn dirt with a mixture of steam and hot water at 70°C.

Ergonomically shaped handle

This special handle is ideal for use by both right- and left-handed people because it ensures a perfect and correct grip, without straining the hand or arm during the cleaning operations.

The handle can also be locked in the vertical position for special cleaning requirements.



Green Cleaning: sanitize, saving 93% water



Starting to sanitize with Limatic Carbon is very easy: you just need to fill up the tank with tap water. This simple operation allows you to save money on detergents and protect the environment by completely avoiding the use of chemical detergents. Water consumption is reduced by about 93% if compared with traditional cleaning methods.


This is the ultimate green cleaning.

Patented Easy Clean System

The Easy Clean system allows a complete and effective cleaning of the filter system.

The tank was designed to be removed and washed under running water.

A practical solution to clean your steam cleaner in a few simple steps.

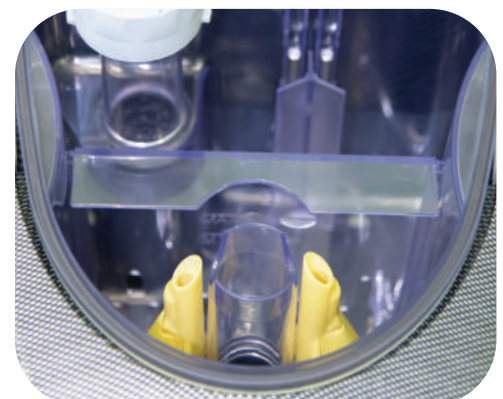



LIMATIC CARBON

POWER SUPPLY	230 V
HEATING UP TIME, BEFORE USE	3 MINUTES
BOILER REFILL SYSTEM	AUTOMATIC REFILL
OPERATING PRESSURE	5.5 BAR (550 kPa)
MAXIMUM TEMPERATURE	162 ° C
BOILER CAPACITY	1 L
BOILER MATERIAL	AISI 304
BOILER POWER	2.200 W
VACUUM POWER	1.200 W
STEAM PRODUCTION	up to 70 gr. / min
MAXIMUM POWER ABSORBED	3.350 W
STEAM FLOW ADJUSTMENT	YES, MANUAL
SUCTION POWER ADJUSTMENT	YES, WITH 3 LEVELS
FILTRATION SYSTEM	WATER VENTURI
MAXIMUM DEPRESSION	2.500 mm H ₂ O
AIR FLOW	85 m ³ /h
WATER TANK CAPACITY	1 L
DETERGENT TANK CAPACITY	1.7 L
RECOVERY TANK CAPACITY	1.6 L
DIMENSIONS L x W x H	520 / 330 / 275 mm
RANGE OF ACTION	10 m
NET WEIGHT	10.5 KG



TPA IMPEX S.p.A. è una società italiana fondata nel **1987** da Luigi Amoretti con sede nel nord est d'Italia, a **Romano d'Ezzelino (VI)**. L'azienda vanta **oltre 30 anni di esperienza nella progettazione e produzione** di sistemi per la sanificazione di ambienti domestici e industriali. La costante attività di Ricerca & Sviluppo testimonia l'assiduo impegno nel trovare **soluzioni altamente tecnologiche** nel pieno rispetto dell'ambiente e della sicurezza.

Inoltre, l'attenzione per i processi di lavorazione dei prodotti, **100% Made In Italy**, e la selezione accurata di materiali e partner d'eccellenza, rappresentano quel plus strategico che impegna l'azienda nella costante difesa e valorizzazione del **know-how italiano**.

Contattaci

*LIMATIC CARBON ottimizza le tue operazioni di pulizia,
contattaci per un preventivo o una dimostrazione!*

Telefono :
+39 0424 832777

Email :
info@tpaimpex.it

LinkedIn :
[@tpa-impex](https://www.linkedin.com/company/tpa-impex)

Indirizzo :
**Piazzetta Albere 3/4, Romano
d'Ezzelino (VI), 36060, Italia**

Youtube :
[@TpaimpexSpA](https://www.youtube.com/channel/UCpalmimpex)

Facebook :
[@tpasteamcleaning](https://www.facebook.com/tpasteamcleaning)